
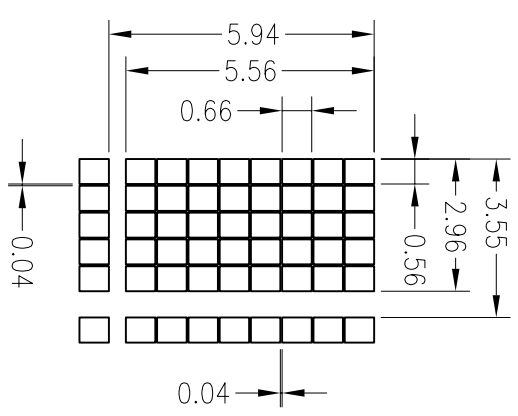
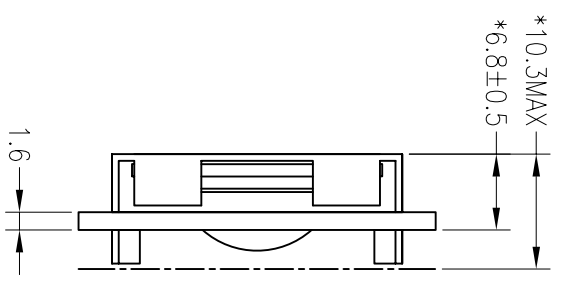


REV 版本	DESCRIPTION 描述	DATE 日期
A	First issue	MAR-08-2008

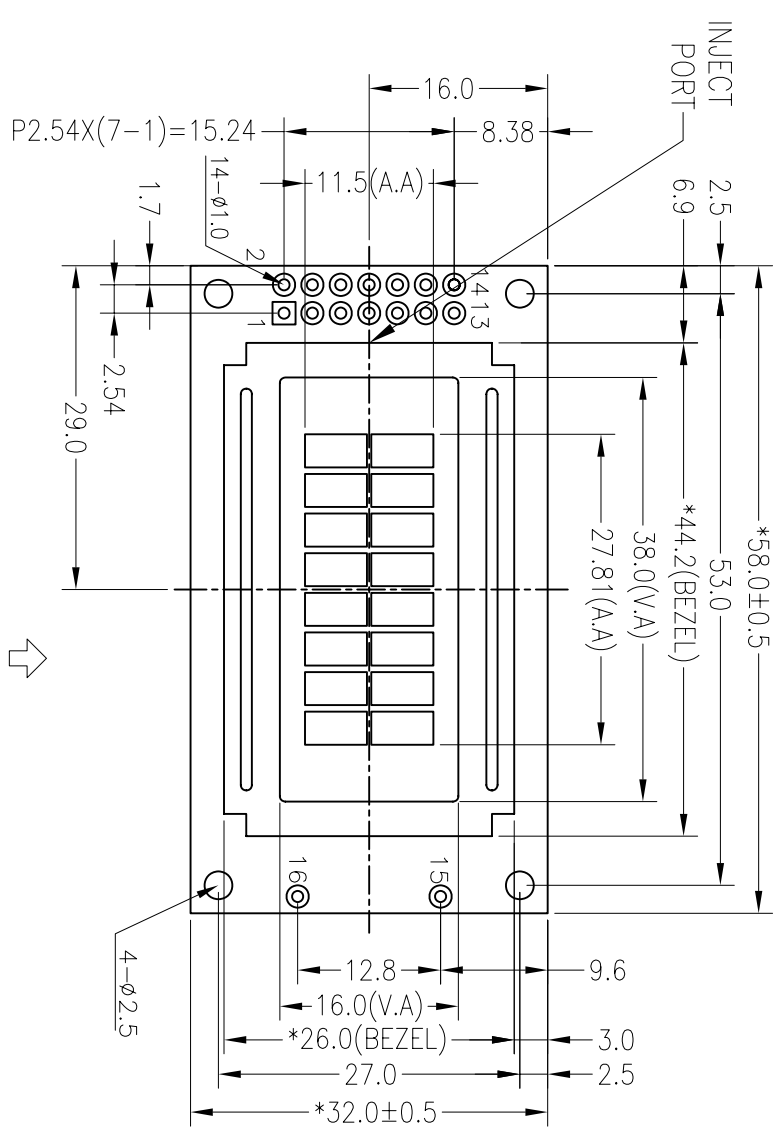


VIEWING DIRECTION ↙

Specification:


- 1). Driving: Duty:1/16,Bias:1/5, VLCD:5.0V, VDD:5.0V
- 2). Viewing angle: 6 O'clock
- 3). Display mode:TN/Positive/Reflective/Gray
- 4). Operating temp.: 0°C~+50°C
Storage temp.: -20°C~+70°C
- 5). IC: SPLC780D-001B-C (Or Compatible)
- 6). Dimensions with mark "*" are important, with mark "()" are referenced
- 7). All the raw materials are RoHS compliant

PIN	1	2	3	4	5	6	7	8
CONNECTION	VSS	VDD	V0	RS	R/W	E	DB0	DB1
PIN	9	10	11	12	13	14	15	16
CONNECTION	DB2	DB3	DB4	DB5	DB6	DB7	LEDA	LEDK

DOTS SIZE
SCALE 4:1



深圳秋田微电子有限公司
SHENZHEN AVID DISPLAY CO., LTD.

PART NO: 零件编号	C/D结构图	PROJECTION 三角法	MODULE NUMBER 模组型号	SCALE 比例	FTT 适应图面
ABC008002D13-TAN-R		ABC008002D13-TAN-R	APP: 签字	SHEET: 页次	1 OF 1
DO NOT SCALE THIS DRAWING.			CHK: 日期	GENERAL TOL: 公差	UNIT 单位 mm
			DWN: 日期		